

Attorney Docket No.: 450100-04502

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT(S): Tetsuaki Kiriyama GROUP ART UNIT: 2426

APPLICATION NO.: 10/510,169 EXAMINER: ZHONG, JUN FEI

FILING DATE: October 4, 2004 Confirmation No.: 6834

TITLE: INFORMATION DISTRIBUTION SYSTEM AND METHOD,
INFORMATION TRANSMISSION APPARATUS AND METHOD, INFORMATION
RECEPTION APPARATUS AND METHOD, RECORDING MEDIUM, AND PROGRAMHon. Commissioner of Patents and Trademarks,
Washington, D.C. 20231

S I R:

CERTIFIED TRANSLATION

I, Masaaki Iwami of 3-22, Asagaya-minami 1-chome, Suginami-ku, Tokyo, Japan, am an experienced translator of the Japanese language into the English language and I hereby certify that the attached comprises an accurate translation into English of Japanese Patent Application 2002-103787 filed April 5, 2002.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

January 23, 2009

Date



Masaaki IWAMI

[Name of Document] Specification

[Title of the Invention] Information Distribution System
and Method, Information Transmission Apparatus and Method,
Information Reception Apparatus and Method, Recording
Medium, and Program

[What is Claimed is]

[Claim 1] An information distribution system comprising
an information transmission apparatus for transmitting
main information and an information reception apparatus
for receiving the main information transmitted from the
information transmission apparatus, the information
reception apparatus being connected to the information
transmission apparatus via a network, wherein

the information transmission apparatus generates
first control information for making a request to the
information reception apparatus for transmission of a
result of a determination as to whether or not the
information reception apparatus can receive the main
information, and transmits the generated first control
information via the network;

the information reception apparatus, when receiving
the first control information transmitted from the
information transmission apparatus via the network,
determines whether or not to receive the main information

transmitted from the information transmission apparatus that has transmitted the received first control information and generates second control information indicating a result of the determination to transmit the generated second control information to the information transmission apparatus via the network; and

the information transmission apparatus receives the second control information transmitted from the information reception apparatus via the network, and prohibits the transmission of the main information to the information reception apparatus if the received second control information indicates a determination result that the main information is not received, or transmits the main information to the information reception apparatus via the network if the second control information indicates a determination result that the main information is received.

[Claim 2] An information distribution method of an information distribution system including an information transmission apparatus for transmitting main information and an information reception apparatus for receiving the main information transmitted from the information transmission apparatus, the information reception apparatus being connected to the information transmission

apparatus via a network, the method comprising:

a first transmission step of generating, in the information transmission apparatus, first control information for making a request to the information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive the main information, and transmitting the generated first control information via the network;

a second transmission step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the received first control information is received when the information reception apparatus receives via the network the first control information transmitted from the information transmission apparatus by the processing in the first transmission step, and generating second control information indicating a result of the determination to transmit the generated second control information to the information transmission apparatus via the network; and

a transmission control step of receiving in the information transmission apparatus via the network the second control information transmitted from the

information reception apparatus by the processing in the second transmission step, and prohibiting the transmission of the main information to the information reception apparatus if the received second control information indicates a determination result that the main information is not received, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the main information is received.

[Claim 3] An information transmission apparatus connected to an information reception apparatus via a network, comprising:

generation means for generating first control information for making a request to the information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information;

transmission means for transmitting the first control information generated by the generation means to the information reception apparatus via the network;

reception means for receiving, via the network, second control information transmitted from the information reception apparatus as a response to the

first control information transmitted by the transmission means, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and

transmission control means for prohibiting the transmission means from transmitting the main information to the information reception apparatus if the second control information received by the reception means indicates a determination result that the information reception apparatus does not receive the main information, or permitting the transmission means to transmit the main information to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[Claim 4] The information transmission apparatus according to claim 3, wherein the transmission means transmits the first control information with the main information when the transmission means transmits the main information.

[Claim 5] The information transmission apparatus according to claim 3, wherein the transmission means transmits the first control information at a predetermined time interval.

[Claim 6] The information transmission apparatus according to claim 3, wherein the first and second control information are RTCP packet information.

[Claim 7] The information transmission apparatus according to claim 3, wherein if the second control information is information indicating a reception state at the information reception apparatus, the transmission control means determines that the second control information indicates a determination result that the information reception apparatus receives the main information and permits the transmission means to transmit the main information to the information reception apparatus via the network.

[Claim 8] The information transmission apparatus according to claim 7, wherein the reception state is represented by a state of occurrence of an error in the main information received by the information reception apparatus.

[Claim 9] An information transmission method of an information transmission apparatus connected to an information reception apparatus via a network, the method comprising:

a generation step of generating first control information for making a request to the information

reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information;

a transmission step of transmitting the first control information generated by the processing in the generation step to the information reception apparatus via the network;

a reception step of receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and

a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination

result that the information reception apparatus receives the main information.

[Claim 10] A recording medium having a program recorded thereon, the program enabling a computer to execute a control method for controlling an information transmission apparatus connected to an information reception apparatus via a network, the control method comprising:

- a generation step of generating first control information for making a request to the information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information;

- a transmission step of transmitting the first control information generated by the processing in the generation step to the information reception apparatus via the network;

- a reception step of receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main

information; and

a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[Claim 11] A program for enabling a computer to execute a control method for controlling an information transmission apparatus connected to an information reception apparatus via a network, the control method comprising:

a generation step of generating first control information for making a request to the information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information;

a transmission step of transmitting the first control information generated by the processing in the

generation step to the information reception apparatus via the network;

a reception step of receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and

a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[Claim 12] An information reception apparatus connected to an information transmission apparatus for transmitting main information via a network, comprising:

reception means for receiving first control information transmitted from the information transmission apparatus via the network, the first control information making a request for transmission of a result of a determination as to whether or not the main information can be received;

generation means for determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the reception means and generating second control information indicating a result of the determination; and

transmission means for transmitting the second control information generated by the generation means to the information transmission apparatus via the network.

[Claim 13] The information reception apparatus according to claim 12, wherein

the information reception apparatus is connected to a first information transmission apparatus and to a second information transmission apparatus via the network;

the generation means determines that the main information transmitted from the second information

transmission apparatus is not received when the first control information is received from the second information transmission apparatus while the main information transmitted from the first information transmission apparatus is being received by the reception means, and generates second control information indicating a result of the determination; and

the transmission means transmits the second control information generated by the generation means to the second information transmission apparatus via the network.

[Claim 14] The information reception apparatus according to claim 12, wherein the first and second control information are RTCP packet information.

[Claim 15] The information reception apparatus according to claim 12, wherein the generation means generates information indicating a reception state at the information reception apparatus as the second control information when a determination is made that the main information is received.

[Claim 16] The information reception apparatus according to claim 15, wherein the reception state is represented by a state of occurrence of an error in the main information received by the reception means.

[Claim 17] An information reception method of an

information reception apparatus connected to an information transmission apparatus for transmitting main information via a network, comprising:

a reception step of receiving first control information transmitted from the information transmission apparatus via the network, the first control information making a request for transmission of a result of a determination as to whether or not the main information can be received;

a generation step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the processing in the reception step and generating second control information indicating a result of the determination; and

a transmission step of transmitting the second control information generated by the processing in the generation step to the information transmission apparatus via the network.

[Claim 18] A recording medium having a program recorded thereon, the program enabling a computer to execute a control method for controlling an information reception apparatus connected to an information transmission

apparatus for transmitting main information via a network,
the control method comprising:

a reception step of receiving first control
information transmitted from the information transmission
apparatus via the network, the first control information
making a request for transmission of a result of a
determination as to whether or not the main information
can be received;

a generation step of determining whether or not the
main information transmitted from the information
transmission apparatus that has transmitted the first
control information is received when the first control
information is received by the processing in the
reception step and generating second control information
indicating a result of the determination; and

a transmission step of transmitting the second
control information generated by the processing in the
generation step to the information transmission apparatus
via the network.

[Claim 19] A program for enabling a computer to execute
a control method for controlling an information reception
apparatus connected to an information transmission
apparatus for transmitting main information via a network,
the control method comprising:

a reception step of receiving first control information transmitted from the information transmission apparatus via the network, the first control information making a request for transmission of a result of a determination as to whether or not the main information can be received;

a generation step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the processing in the reception step and generating second control information indicating a result of the determination; and

a transmission step of transmitting the second control information generated by the processing in the generation step to the information transmission apparatus via the network.

[Detailed Description of the Invention]

[0001]

[Technical Field to which the Invention Pertains]

The present invention relates to an information distribution system and method, information transmission apparatus and method, information reception apparatus and

method, recording medium, and program, and in particular to an information distribution system and method, information transmission apparatus and method, information reception apparatus and method, recording medium, and program that can reliably distribute an image transmitted from each of two or more transmission apparatuses to a reception apparatus even in a limited band.

[0002]

[Prior Art]

Nowadays, information distribution systems for distributing a large volume of information, such as image signals, from transmission apparatuses to reception apparatuses via communication lines are becoming widely used.

[0003]

[Problems to be Solved by the Invention]

In a typical known information distribution system, however, image signals are generally distributed from one transmission apparatus to one reception apparatus, and signals (including not only image signals but also, for example, control signals) are transmitted unidirectionally from a transmission apparatus to a reception apparatus. Furthermore, once a transmission

apparatus starts the distribution of an image signal, the distribution of the image signals continues regardless of the state of the line between the transmission apparatus and the reception apparatus or the state of the transmission destination (reception apparatus).

[0004]

Thus, there is a first problem in that the transmission apparatus has difficulty in monitoring the reception state (e.g., whether or not an error has occurred) at the reception apparatus.

[0005]

Furthermore, when two or more transmission apparatuses simultaneously distribute image signals to one reception apparatus via a line with a limited line capacity, an overflow of image signals may occur due to the band limit of the line (image signals from two or more transmission apparatuses may overflow on the line, and cannot be transmitted). Any processing at the reception apparatus is not satisfactory in preventing the occurrence of this overflow of image signals, and hence processing at the transmission apparatus is required.

[0006]

In addition to the above-described first problem, because the reception apparatus cannot control the

transmission apparatus, there is a second problem in that the transmission apparatus has difficulty in taking a preventive measure against the occurrence of image signal overflow.

[0007]

In view of the problems described above, the present invention enables images transmitted from each of two or more transmission apparatuses to be reliably distributed to a reception apparatus, even in a limited band.

[0008]

[Means for Solving the Problems]

An information distribution system according to the present invention is characterized in that an information transmission apparatus generates first control information for making a request to an information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information and transmits the generated first control information via a network; the information reception apparatus, when receiving the first control information transmitted from the information transmission apparatus via the network, determines whether or not to receive the main information

transmitted from the information transmission apparatus that has transmitted the received first control information and generates second control information indicating a result of the determination to transmit the generated second control information to the information transmission apparatus via the network; and the information transmission apparatus receives the second control information transmitted from the information reception apparatus via the network, and prohibits the transmission of the main information to the information reception apparatus if the received second control information indicates a determination result that the main information is not received, or transmits the main information to the information reception apparatus via the network if the second control information indicates a determination result that the main information is received.

[0009]

An information distribution method of an information distribution system according to the present invention is characterized by including a first transmission step of generating, in an information transmission apparatus, first control information for making a request to an information reception apparatus

for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information and transmitting the generated first control information via a network; a second transmission step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the information reception apparatus receives via the network the first control information transmitted from the information transmission apparatus by the processing in the first transmission step, and generating second control information indicating a result of the determination to transmit the generated second control information to the information transmission apparatus via the network; and a transmission control step of receiving in the information transmission apparatus via the network the second control information transmitted from the information reception apparatus by the processing in the second transmission step, and prohibiting the transmission of the main information to the information reception apparatus if the received second control information indicates a determination result that the main information is not received, or permitting the main information to be

transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the main information is received.

[0010]

In the information distribution system and method according to the present invention where an information transmission apparatus for transmitting main information and an information reception apparatus for receiving the main information are interconnected via a network, first control information for making a request to the information reception apparatus for transmission of a result of a determination as to whether or not the information reception apparatus can receive the main information is generated by the information transmission apparatus and transmitted via the network; a determination is made as to whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received as a response to the first control information when the information reception apparatus receives the first control information, and second control information indicating a result of the determination is generated and transmitted to the

information transmission apparatus via the network; and the second control information is received by the information transmission apparatus via the network. The transmission of the main information to the information reception apparatus is prohibited by the information transmission apparatus if the second control information indicates a determination result that the main information is not received or the main information is transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the main information is received.

[0011]

The information distribution system according to the present invention can be any system where an information transmission apparatus transmits information to an information reception apparatus via a network. Each of the information transmission apparatus and the information reception apparatus included in the information distribution system may transmit and receive information to and from another apparatus with or without a network. In other words, each of the information transmission apparatus and the information reception apparatus of the information distribution system

according to the present invention may be an apparatus that can perform either or both of transmission and reception of information.

[0012]

An information transmission apparatus according to the present invention is characterized by including generation means for generating first control information for making a request to an information reception apparatus interconnected via a network for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information; transmission means for transmitting the first control information generated by the generation means to the information reception apparatus via the network; reception means for receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the transmission means, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and transmission control means for prohibiting the transmission means from transmitting the main information to the information reception apparatus if the second

control information received by the reception means indicates a determination result that the information reception apparatus does not receive the main information, or permitting the transmission means to transmit the main information to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[0013]

The transmission means transmits the first control information with the main information when the transmission means transmits the main information.

[0014]

The transmission means transmits the first control information at a predetermined time interval.

[0015]

The first and second control information are RTCP packet information.

[0016]

If the second control information is information indicating a reception state at the information reception apparatus, the transmission control means determines that the second control information indicates a determination result that the information reception apparatus receives

the main information and permits the transmission means to transmit the main information to the information reception apparatus via the network. Furthermore, the reception state is represented by a state of occurrence of an error in the main information received by the information reception apparatus.

[0017]

An information transmission method of an information transmission apparatus according to the present invention is characterized by including a generation step of generating first control information for making a request to an information reception apparatus interconnected via a network for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information; a transmission step of transmitting the first control information generated by the processing in the generation step to the information reception apparatus via the network; a reception step of receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to

whether or not the information reception apparatus receives the main information; and a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[0018]

A program on a first recording medium according to the present invention is characterized by including a generation step of generating first control information for making a request to an information reception apparatus interconnected via a network for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information; a transmission step of transmitting the first control information generated by the processing in the generation step to the information reception apparatus via the network; a reception step of receiving,

via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[0019]

A first program according to the present invention is characterized by enabling a computer to execute a generation step of generating first control information for making a request to an information reception apparatus interconnected via a network for transmission of a result of a determination as to whether or not the

information reception apparatus can receive main information; a transmission step of transmitting the first control information generated by the processing in the generation step to the information reception apparatus via the network; a reception step of receiving, via the network, second control information transmitted from the information reception apparatus as a response to the first control information transmitted by the processing in the transmission step, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information; and a transmission control step of prohibiting the main information from being transmitted to the information reception apparatus if the second control information received by the processing in the reception step indicates a determination result that the information reception apparatus does not receive the main information, or permitting the main information to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[0020]

According to the information transmission apparatus,

method, recording medium, and program of the present invention, first control information for making a request to an information reception apparatus interconnected via a network for transmission of a result of a determination as to whether or not the information reception apparatus can receive main information is generated; the first control information is transmitted to the information reception apparatus via the network; and, as a response to the transmitted first control information, second control information transmitted from the information reception apparatus is received via the network, the second control information indicating a result of a determination as to whether or not the information reception apparatus receives the main information. The main information is prohibited from being transmitted to the information reception apparatus if the received second control information indicates a determination result that the information reception apparatus does not receive the main information or the main information is permitted to be transmitted to the information reception apparatus via the network if the second control information indicates a determination result that the information reception apparatus receives the main information.

[0021]

The information transmission apparatus according to the present invention can be any apparatus that transmits information to an information reception apparatus connected via a network. The information transmission apparatus may transmit and receive information to and from another apparatus with or without a network. In other words, the information transmission apparatus according to the present invention may be an apparatus that can perform only transmission or both of transmission and reception of information.

[0022]

An information reception apparatus according to the present invention is characterized by including reception means for receiving via a network first control information transmitted from an information transmission apparatus interconnected via the network, the first control information making a request for transmission of a result of a determination as to whether or not main information can be received; generation means for determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received

by the reception means and generating second control information indicating a result of the determination; and transmission means for transmitting the second control information generated by the generation means to the information transmission apparatus via the network.

[0023]

The information reception apparatus is connected to a first information transmission apparatus and to a second information transmission apparatus via the network. The generation means determines that the main information transmitted from the second information transmission apparatus is not received when the first control information is received from the second information transmission apparatus while the main information transmitted from the first information transmission apparatus is being received by the reception means, and generates second control information indicating a result of the determination; and the transmission means transmits the second control information generated by the generation means to the second information transmission apparatus via the network.

[0024]

The first and second control information are RTCP packet information.

[0025]

The generation means generates information indicating a reception state at the information reception apparatus as the second control information when a determination is made that the main information is received. Furthermore, the reception state is represented by a state of occurrence of an error in the main information received by the reception means.

[0026]

An information reception method of an information reception apparatus according to the present invention is characterized by including a reception step of receiving via a network first control information transmitted from an information transmission apparatus interconnected via the network, the first control information making a request for transmission of a result of a determination as to whether or not main information can be received; a generation step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the processing in the reception step and generating second control information indicating a result of the determination; and a

transmission step of transmitting the second control information generated by the processing in the generation step to the information transmission apparatus via the network.

[0027]

A program on a second recording medium according to the present invention is characterized by including a reception step of receiving via a network first control information transmitted from an information transmission apparatus interconnected via the network, the first control information making a request for transmission of a result of a determination as to whether or not main information can be received; a generation step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the processing in the reception step and generating second control information indicating a result of the determination; and a transmission step of transmitting the second control information generated by the processing in the generation step to the information transmission apparatus via the network.

[0028]

A second program according to the present invention is characterized by enabling a computer to execute a reception step of receiving via a network first control information transmitted from an information transmission apparatus interconnected via the network, the first control information making a request for transmission of a result of a determination as to whether or not main information can be received; a generation step of determining whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received when the first control information is received by the processing in the reception step and generating second control information indicating a result of the determination; and a transmission step of transmitting the second control information generated by the processing in the generation step to the information transmission apparatus via the network.

[0029]

According to the information reception apparatus, method, second recording medium, and second program of the present invention, when first control information transmitted from an information transmission apparatus interconnected via a network, i.e., the first control

information making a request for transmission of a result of a determination as to whether or not main information can be received, is received via the network, a determination is made as to whether or not the main information transmitted from the information transmission apparatus that has transmitted the first control information is received as a response to the received first control information, and second control information indicating a result of the determination is generated and transmitted to the information transmission apparatus via the network.

[0030]

The information reception apparatus according to the present invention can be any apparatus that receives information from an information transmission apparatus connected via a network. The information reception apparatus may transmit and receive information to and from another apparatus with or without a network. In other words, the information reception apparatus according to the present invention may be an apparatus that can perform only reception or both of transmission and reception of information.

[0031]

[Mode for Carrying Out the Invention]

Fig. 1 shows an example structure of an information distribution system to which the present invention is applied.

[0032]

In an information distribution system 1, any number of transmission apparatuses (two transmission apparatuses in the example of Fig. 1, i.e., a transmission apparatus 11-1 and a transmission apparatus 11-2) and one reception apparatus 13 are interconnected via a network 12.

[0033]

It is assumed that Ethernet (R) is used for the network 12 in this example, although any type of network is applicable for the network 12.

[0034]

The transmission apparatus 11-1 transmits (distributes) main information to the reception apparatus 13 via the network 12.

[0035]

Although the main information distributed to the reception apparatus 13 is not limited to a particular type in this example, it is assumed that image signals and audio signals (e.g., image signals and audio signals in compliance with MPEG (Moving Picture Experts Group) data) are transmitted to the reception apparatus 13.

Although the following description focuses on an image signal only as the main information (as the main distributed information) to make the description understood easily, the corresponding audio signal can also be transmitted along with the image signal.

[0036]

Furthermore, a method for distributing the main information (image signal in this example) to the reception apparatus 13 is not limited to a particular type, though this example assumes that the main information is transmitted in RTP (Real-time Transport Protocol) packets. In short, the main information is distributed to the reception apparatus 13 in RTP packets. Thus, hereinafter, the main information distributed to the reception apparatus 13 is referred to as the RTP, as required.

[0037]

The transmission apparatus 11-1 transmits, along with an image signal (RTP), a first control signal to the reception apparatus 13 via the network 12, i.e., the first control signal which makes a request for a result of determination as to whether or not the RTP can be received (whether or not the RTP should be received).

[0038]

When the reception apparatus 13 receives the first control signal transmitted by the transmission apparatus 11-1 via the network 12, the reception apparatus 13 determines whether or not the RTP transmitted by the information transmission apparatus 11-1 should be received, and generates a second control signal indicating the determination result to transmit it to the transmission apparatus 11-1 via the network 12.

[0039]

Although these first and second control signals are not limited to a particular type, this example assumes that the first and second control signals are RTCP (RTP (Real-time Transport Protocol) Control Protocol) packets.

[0040]

A method where the RTCP specified in RFC (Request For Comments) 1889 of IETF (Internet Engineering Task Force) is used is known as a method for monitoring the traffic state of a network.

[0041]

In this method, the transmitter transmits so-called a "transmission report," i.e., packets (RTCP packets) of information such as the number of transmitted RTPs and a timestamp to the receiver at regular intervals. On the other hand, based on this "transmission report," the

receiver returns, to the transmitter, so-called a "reception report," i.e., packets (RTCP packets) of information including, for example, the rate of RTP loss, the number of missing RTPs, the received maximum sequence number, and the arrival interval jitter.

[0042]

As described above, the RTCP is a protocol between the transmitter and the receiver, and moreover, functions as a protocol regardless of the type of the network connecting the transmitter and the receiver, i.e., regardless of whether the network is a LAN (Local Area Network), a WAN (Wide Area Network), or another type.

[0043]

What corresponds to this "transmission report (RTCP packet)" is the above-described first control signal in this example, and what corresponds to the "reception report (RTCP packet)" is the above-described second control signal.

[0044]

Hereinafter, this first control signal is referred to as the RTCP, and the second control signal is referred to as the RTCP RR, as required.

[0045]

The transmission apparatus 11-1 receives the RTCP

RR transmitted by the reception apparatus 13 via the network 12.

[0046]

If the received RTCP RR is information indicating a determination result such that the RTP will not be accepted (hereinafter, this information is referred to as the RTCP RR (rejection)), the transmission apparatus 11-1 is prohibited from transmitting the RTP to the reception apparatus 13. In contrast, when the received RTCP RR is information indicating a determination result such that the RTP will be accepted (hereinafter, this information is referred to as the RTCP RR (acceptance)), the transmission apparatus 11-1 transmits the RTP to the reception apparatus 13 via the network 12.

[0047]

Now, suppose that the transmission apparatus 11-1 has received the RTCP RR (acceptance). In this case, as described above, the transmission apparatus 11-1 distributes the RTP to the reception apparatus 13 via the network 12.

[0048]

When the transmission apparatus 11-2 is to distribute (transmit) the RTP to the reception apparatus 13 in this situation, the transmission apparatus 11-2

transmits the RTCP, along with the RTP, to the reception apparatus 13 via the network 12, as with the transmission apparatus 11-1.

[0049]

When the reception apparatus 13 receives the RTCP transmitted from the transmission apparatus 11-2 via the network 12, the reception apparatus 13 generates the RTCP RR as a response to the RTCP from the transmission apparatus 11-2, as described above, and transmits it to the transmission apparatus 11-2 via the network 12. More specifically, since the reception apparatus 13 has already received the RTP distributed from the transmission apparatus 11-1, the reception apparatus 13 determines that it cannot accept the RTP distributed from the transmission apparatus 11-2, and generates the RTCP RR (rejection) to transmit it to the transmission apparatus 11-2 via the network 12.

[0050]

When the transmission apparatus 11-2 receives this RTCP RR (rejection) via the network 12, the transmission apparatus 11-2 stops the subsequent distribution of the RTP to the reception apparatus 13.

[0051]

It is to be noted, however, that even though the

transmission apparatus 11-2 stops the distribution of the RTP to the reception apparatus 13, the transmission apparatus 11-2 still repeats the processing of transmitting the RTCP to the reception apparatus 13 via the network 12 at predetermined time intervals.

[0052]

As a result, for example, if the transmission apparatus 11-1 stops the distribution of the RTP to the reception apparatus 13 for some reason, the reception apparatus 13 does not receive the RTP from the transmission apparatus 11-1. Therefore, the reception apparatus 13 generates the RTCP RR (acceptance), as a response to the RTCP that has been subsequently received from the transmission apparatus 11-2, and transmits it to the transmission apparatus 11-2 via the network 12.

[0053]

When the transmission apparatus 11-2 receives this RTCP RR (acceptance) via the network 12, the transmission apparatus 11-2 resumes the distribution of the RTP to the reception apparatus 13, and transmits the RTP to the reception apparatus 13 via the network 12.

[0054]

An example structure of the transmission apparatus 11-1 and the transmission apparatus 11-2 will now be

described with reference to Fig. 2. Hereinafter, when it is not necessary to discriminate between the transmission apparatus 11-1 and the transmission apparatus 11-2, they are referred to just as the transmission apparatus 11.

[0055]

In the example of Fig. 2, in addition to the above-described network 12, a video tape recorder 21, which supplies the transmission apparatus 11 with an image signal, is connected to the transmission apparatus 11. As a device which is connected to the transmission apparatus 11, any type of device that can provide main information is acceptable. For example, a digital video camera can be connected, instead of the video tape recorder 21 in Fig. 2.

[0056]

The transmission apparatus 11 includes a video encoder 31 which compresses and encodes a video signal input from the video tape recorder 21; an audio encoder 32 which compresses and encodes an audio signal input from the video tape recorder 21; and a multiplexer 33 which multiplexes the video signal encoded by the video encoder 31 and the audio signal encoded by the audio encoder 32.

[0057]

The transmission apparatus 11 further includes a buffer 34 for storing RTP packets of a multiplexed signal supplied from the multiplexer 33 (storing the above-described RTP (image signal)); a database 35 for storing information such as the address of the distribution destination; a network controller 36 for generating the above-described RTCP (the first control signal) based on the information stored in the database 35, supplying the RTCP to the buffer 37, and controlling the output of the RTP stored in the buffer 34 to an arbiter 38; the arbiter 38 for multiplexing the RTP supplied from the buffer 34 and the RTCP supplied from the buffer 37; and a transmitter 39 for transmitting to the network 12 a signal (multiplexed signal of the RTP and the RTCP or the RTCP) supplied from the arbiter 38.

[0058]

If the video tape recorder 21 has functions corresponding to the video encoder 31, the audio encoder 32, and the multiplexer 33, then the video encoder 31, the audio encoder 32, and the multiplexer 33 can be omitted.

[0059]

The transmission apparatus 11 further includes a receiver 40 for receiving via the network 12 the RTP RR

(the above-described second control signal) transmitted by the reception apparatus 13 (Fig. 1); and a buffer 42 for acquiring and storing the RTP RR received by the receiver 40 via an arbiter comparator 41.

[0060]

The network controller 36 detects the RTCP RR stored in the buffer 42, and, as described above, if the RTCP RR is the RTCP RR (rejection), the RTP stored in the buffer 34 is prohibited from being supplied to the arbiter 38. In this case, the RTP is not distributed to the reception apparatus 13 (Fig. 1) via the network 12, but the RTCP only is transmitted to the reception apparatus 13 via the network 12 at predetermined time intervals.

[0061]

In contrast, if the RTCP RR acquired from the buffer 42 is the RTCP RR (acceptance), the network controller 36 permits the RTP stored in the buffer 34 to be supplied to the arbiter 38. In this case, the RTP is multiplexed with the RTCP by the arbiter 38 and distributed to the reception apparatus 13 (Fig. 1) via the transmitter 39 and the network 12. Thus, only the RTCP is transmitted to the reception apparatus 13 via the network 12 at predetermined time intervals.

[0062]

As described above, in the transmission apparatus 11, the network controller 36 included in the transmission apparatus 11 controls whether or not to transmit the RTP (image signal) to the reception apparatus 13 based on the RTCP RR from the reception apparatus 13. Therefore, even when image signal packets are transferred in a limited band shared by another transmission apparatus on the network 12, there is no possibility of one of the image signal packets being discarded. Consequently, the image corresponding to the RTP received by the reception apparatus 13 can be prevented from deteriorating. Furthermore, the reception state at the reception apparatus 13 can be detected.

[0063]

In the example of Fig. 2, the transmission apparatus 11 further includes blocks of the arbiter comparator 41, a buffer 43, a demultiplexer 44, a video decoder 45, and an audio decoder 46. These blocks, as described below, are utilized when the transmission apparatus 11 also functions as a reception apparatus. More specifically, these blocks can be omitted when the transmission apparatus 11 (also serves as a reception function) functions only as a transmission apparatus, and

therefore, the description of these blocks are omitted (to be described below as a description of the corresponding block in the reception apparatus 13 in Fig. 3).

[0064]

Fig. 3 shows an example structure of the reception apparatus 13.

[0065]

In the example of Fig. 3, in addition to the above-described network 12, a video tape recorder 61 that records an image signal output from the reception apparatus 13 is connected to the reception apparatus 13. As a device which is connected to the reception apparatus 13, any type of device that can acquire and handle the main information is acceptable. For example, a digital video camera can be connected, instead of the video tape recorder 61 in Fig. 3.

[0066]

Each of the components from the video encoder 71 to the receiver 80 in the reception apparatus 13 has the same structure as that of the corresponding component from the video encoder 31 to the receiver 40 in the transmission apparatus 11 of Fig. 2.

[0067]

In short, the transmission apparatus 11 and the reception apparatus 13 can include the same components. In other words, the transmission apparatus 11 can have the function of the reception apparatus 13, and similarly, the reception apparatus 13 can have the function of the transmission apparatus 11.

[0068]

The receiver 80 receives a signal (a multiplexed signal of the RTP (image signal) and the RTCP (the first control signal) or the RTCP) transmitted from the transmission apparatus 11 via the network 12.

[0069]

If the signal supplied from the receiver 80 is a multiplexed signal, the arbiter comparator 81 separates the multiplexed signal into the RTP and the RTCP, supplies the buffer 83 with the RTP, and supplies the buffer 82 with the RTCP. Furthermore, when the signal supplied from the receiver 40 is the RTCP, the arbiter comparator 81 supplies the buffer 82 with the RTCP as-is.

[0070]

The database 75 records information about a transmitter whose output is accepted by the reception apparatus 13 (the transmission apparatus 11-1 or the transmission apparatus 11-2 in the example of Fig. 1)

(hereinafter, referred to as reception acceptance information).

[0071]

When the RTCP is stored in the buffer 82, the network controller 76 compares the RTCP with the reception acceptance information stored in the database 75, generates the RTP RR (the RTCP RR (acceptance) or the RTCP RR (rejection)) as a signal for responding to the RTCP, i.e., as the above-described second control signal, based on the comparison result, and supplies it to the buffer 77. The RTCP RR supplied to the buffer 77 is transmitted to the network 12 via the arbiter 78 and the transmitter 79, and transmitted to the corresponding transmission apparatus 11 via the network 12.

[0072]

The demultiplexer 84 separates the RTP stored in the buffer 83 into the video signal and the audio signal, supplies the video decoder 85 with the video signal, and supplies the audio decoder 86 with the audio signal.

[0073]

The video decoder 85 decodes the compressed and encoded video signal supplied by the demultiplexer 84 and supplies it to the video tape recorder 61.

[0074]

The audio decoder 86 decodes the compressed and encoded audio signal supplied by the demultiplexer 84, and supplies it to the video tape recorder 61.

[0075]

If the video tape recorder 61 has the functions corresponding to the video decoder 85, the audio decoder 86, and the demultiplexer 84, then the video decoder 85, the audio decoder 86, and the demultiplexer 84 can be omitted.

[0076]

Furthermore, the blocks of the video encoder 71, the audio encoder 72, the multiplexer 73, and the buffer 74 can be omitted when the reception apparatus 13 functions only as a reception apparatus. Therefore, the description of these blocks is omitted because the corresponding blocks in Fig. 2 (the video encoder 31, the audio encoder 32, the multiplexer 33, and the buffer 34) have already been described.

[0077]

As described above, in the reception apparatus 13, the network controller 76 included in the reception apparatus 13 determines whether or not to receive, as a response to the RTCP from the transmission apparatus 11, the RTP (image signal) from the transmission apparatus 11

that has transmitted the RTCP and generates the RTCP RR indicating the determination result to transmit it to the transmission apparatus 11. Therefore, even when image signal packets are transferred in a limited band shared by two or more transmission apparatuses 11 on the network 12, there is no possibility of one of the image signal packets being discarded. Consequently, the image corresponding to the RTP received by the reception apparatus 13 can be prevented from deteriorating. Furthermore, image signals from two or more transmission apparatuses (the transmission apparatus 11-1 and the transmission apparatus 11-2 in the example of Fig. 1) can be acquired.

[0078]

An example of the state of the transmission apparatus 11 (Fig. 2) will now be described with reference to Fig. 4.

[0079]

In this example, as shown in Fig. 4, the state of the transmission apparatus 11 is one of the states SA to SD.

[0080]

The state SA indicates that the transmission apparatus 11 does not transmit a signal, i.e., that the

transmission apparatus 11 does not transmit the RTP (image signal) or the RTCP (the first control signal).

[0081]

In contrast, the state SB to state SD indicate states where the transmission apparatus 11 transmits a signal, i.e., the above-described multiplexed signal of the RTP and the RTCP or the RTCP.

[0082]

The state SB indicates that the RTP (the RTP included in the multiplexed signal of the RTP and the RTCP) transmitted from the transmission apparatus 11 is being normally received by the reception apparatus 13 via the network 12. When the state of the transmission apparatus 11 is the state SB, the transmission apparatus 11 transmits the multiplexed signal of the RTP and the RTCP, and periodically transmits the RTCP. In this example, for example, the RTP is transmitted at a rate of 10000 packets/second, and furthermore, the RTCP is periodically transmitted once every five seconds.

[0083]

The state SC indicates that the transmission apparatus 11 cannot distribute the RTP (a multiplexed signal of the RTP and the RTCP) to the reception apparatus 13, which is the distribution destination of

the RTP. It is to be noted, however, that the transmission apparatus 11, even in the state SC, periodically transmits the RTCP in the same manner as in the state SB.

[0084]

The state SD indicates that an error with a predetermined level or higher, such as a packet error, has occurred in the RTP (RTP included in the multiplexed signal of the RTP and the RTCP) transmitted from the transmission apparatus 11 and received by the reception apparatus 13 via the network 12. It is to be noted, however, that the transmission apparatus 11, even in the state SD, transmits a multiplexed signal of the RTP and RTCP and periodically transmits the RTCP in the same manner as in the state SB.

[0085]

In short, when the state of the transmission apparatus 11 changes from the state SA to the state SB, the network controller 36 (Fig. 2) starts to generate the RTCP and starts to control whether or not to supply the arbiter 38 with the RTP stored in the buffer 34.

[0086]

When the state of the transmission apparatus 11 changes to the state SB or the state SD, the network

controller 36 permits the RTP stored in the buffer 34 to be supplied to the arbiter 38. More specifically, the arbiter 38 multiplexes the RTP stored in the buffer 34 and the RTCP stored in the buffer 37 to supply it to the transmitter 39, which then distributes the supplied multiplexed signal of the RTP and the RTCP to the reception apparatus 13 via the network 12.

[0087]

In contrast, when the state of the transmission apparatus 11 changes to the state SC, the network controller 36 stops supplying the arbiter 38 with the RTP stored in the buffer 34. In short, the transmitter 39 stops the distribution (transmission) of the RTP to the reception apparatus 13 via the network 12.

[0088]

Even if the state of the transmission apparatus 11 is one of the states SB to SD, the network controller 36 generates the RTCP, and continues to transmit it to the reception apparatus 13 periodically (e.g., at a rate of once/5 seconds) via the buffer 37, the arbiter 38, the transmitter 39, and, the network 12.

[0089]

As described above, the network controller 36 changes the state of the transmission apparatus 11 to one

of the states SA to SD, and according to the resultant state, controls the transmission of the RTP and RTCP.

[0090]

A state transition from one of the states SA to SD to one of the states SA to SD (including a case where the same state is continued) is carried out when a predetermined condition (hereinafter referred to as state transition condition) is satisfied.

[0091]

In Fig. 4, the above-described state transition conditions are shown in rectangular blocks drawn on arrows, each representing a transition from one state (any of the states SA to SD) to one state (any of the states SA to SD), with numbers 101 to 116.

[0092]

When, for example, the "initial" command is input (the input device is not shown), the network controller 36 determines that the state transition condition 101 has been satisfied, and initializes the state of the transmission apparatus 11 to the state SA.

[0093]

When the RTCP RR received by the receiver 40 (the second control signal transmitted by the reception apparatus 13 via the network 12) is supplied via the

arbiter comparator 41 and the buffer 42 while the transmission apparatus 11 is in the state SA (if the RTCP RR that cannot be supplied is supplied), the network controller 36 determines that the state transition condition 102 has been satisfied, and changes the state of the transmission apparatus 11 from the state SA to the state SA (no state transition is made).

[0094]

When, for example, the "rtp_tx=ON" command (command for directing the start of transmission processing of an image signal) is input while the transmission apparatus 11 is in the state SA, the network controller 36 determines that the state transition condition 104 has been satisfied, and changes the state of the transmission apparatus 11 from the state SA to the state SB.

[0095]

In this case (when the state of the transmission apparatus 11 is changed to the state SB), as described above, the network controller 36 first transmits the multiplexed signal of the RTP and the RTCP via the transmitter 39 and the network 12, and as long as the transmission apparatus 11 remains in the state SB, the network controller 36 transmits the multiplexed signal of the RTP and the RTCP or the RTCP via the transmitter 39

and the network 12.

[0096]

Subsequently, when, for example, the "rtp_tx=OFF" command (command for directing the termination of transmission processing of an image signal) is input while the transmission apparatus 11 remains in the state SB, the network controller 36 determines that the state transition condition 103 has been satisfied, changes the state of the transmission apparatus 11 from the state SB to the state SA, and stops the transmission of the multiplexed signal of the RTP and the RTCP and the RTCP.

[0097]

As described above, when the reception apparatus 13 (Fig. 1) receives via the network 12 the RTCP transmitted by the transmission apparatus 11, the reception apparatus 13 generates the RTCP RR (the second control signal) as a response to the RTCP and transmits it to the transmission apparatus 11 via the network 12.

[0098]

This RTCP RR is the RTCP RR (rejection) or the RTCP RR (acceptance) in the above-described example. In this case, the reception apparatus 13 measures the reception state of the RTP for the transmission apparatus 11 the RTP from which is determined as acceptable, and according

to the measurement result, generates the RTCP RR indicating a state where a normal signal is being received (hereinafter, referred to as the RTCP RR (without error)) or the RTCP RR indicating a state where an error, such as packet error, has occurred in the received signal (hereinafter, referred to as the RTCP RR (with error)).

[0099]

In other words, in this case, the reception apparatus 13 generates the RTCP RR (without error) or the RTCP RR (with error) included in the RTCP RR (acceptance) or generates the RTCP RR (rejection), and then transmits it to the transmission apparatus 11 via the network 12.

[0100]

If, for example, the reception apparatus 13 transmits the RTCP RR (without error), the receiver 40 receives it via the network 12, and supplies it to the network controller 36 via the arbiter comparator 41 and the buffer 42. When the network controller 36 in the state SB acquires this RTCP RR (without error), it determines that the state transition condition 105 has been satisfied, and changes the state of the transmission apparatus 11 from the state SB to the state SB (no state transition is made).

[0101]

Furthermore, if, for example, the reception apparatus 13 transmits the RTCP RR (with error), the receiver 40 receives it via the network 12, and supplies it to the network controller 36 via the arbiter comparator 41 and the buffer 42. When the network controller 36 in the state SB acquires this RTCP RR (with error), it determines that the state transition condition 113 has been satisfied, and changes the state of the transmission apparatus 11 from the state SB to the state SD.

[0102]

In these cases (when the state of the transmission apparatus 11 remains in the state SB or is changed to the state SD), the network controller 36 continues to transmit the multiplexed signal of the RTP and the RTCP or the RTCP via the transmitter 39 and the network 12.

[0103]

In contrast, for example, when the reception apparatus 13 transmits the RTCP RR (rejection), the receiver 40 receives it via the network 12, and then supplies it to the network controller 36 via the arbiter comparator 41 and the buffer 42. When the network controller 36 in the state SB acquires this RTCP RR

(rejection), it determines that the state transition condition 107 has been satisfied, and changes the state of the transmission apparatus 11 from the state SB to the state SC.

[0104]

In this case (when the state of the transmission apparatus 11 is changed to the state SC), the network controller 36, as described above, stops the distribution (transmission) of the RTP (the multiplexed signal of the RTP and the RTCP) to the reception apparatus 13 via the network 12. It is to be noted, however, that the RTCP is continuously transmitted to the reception apparatus 13 via the network 12 at regular intervals.

[0105]

As described above, the state SB indicates that the RTCP RR (without error) is transmitted from the reception apparatus 13 (the reception state at the reception apparatus 13 is normal), the state SD indicates that the RTCP RR (with error) is transmitted from the reception apparatus 13 (an error has occurred in the RTP received by the reception apparatus 13), and the state SC indicates that the RTCP RR (rejection) is transmitted from the reception apparatus 13 (the reception of the RTP is rejected by the reception apparatus 13).

[0106]

When the network controller 36 acquires the RTCP RR, it changes the state of the transmission apparatus 11 to the state corresponding to the type of the acquired RTCP RR, i.e., the state SB corresponding to the RTCP RR (without error), the state SD corresponding to the RTCP RR (with error), or the state SC corresponding to the RTCP RR (rejection).

[0107]

Thus, with the transmission apparatus 11 in the state SD, the network controller 36 determines that the state transition condition 112 has been satisfied when it acquires the RTCP RR (with error), and changes the state of the transmission apparatus 11 from the state SD to the state SD (no transition is made). In contrast, when the network controller 36 acquires the RTCP RR (without error), it determines that the state transition condition 114 has been satisfied and changes the state of the transmission apparatus 11 from the state SD to the state SB, or when the network controller 36 acquires the RTCP RR (rejection), it determines that the state transition condition 115 has been satisfied and changes the state of the transmission apparatus 11 from the state SD to the state SC.

[0108]

Similarly, with the transmission apparatus 11 in the state SC, the network controller 36 determines that the state transition condition 109 has been satisfied when it acquires the RTCP RR (rejection), and changes the state of the transmission apparatus 11 from the state SC to the state SC (no transition is made). In contrast, when the network controller 36 acquires the RTCP RR (without error), it determines that the state transition condition 108 has been satisfied, and changes the state of the transmission apparatus 11 from the state SC to the state SB.

[0109]

In this example, after the reception apparatus 13 has transmitted the RTCP RR (rejection), the reception apparatus 13 does not transmit the RTCP RR (with error) to the transmission apparatus 11 that is the transmission destination of the RTCP RR (rejection). Hence, the transition from the state SC to the state SD, as indicated by the arrow 116, does not exist.

[0110]

Furthermore, when the state of the transmission apparatus 11 is one of the states SB to SD, the network controller 36 performs clocking with a timer (not shown

in the figure). When, for example, "1 second" is clocked, the network controller 36 determines that the corresponding state transition condition 106, the state transition condition 110, or the state transition condition 111 has been satisfied to change the state of the transmission apparatus 11 to the same state (no state transition is made). Because of this, if the RTCP RR is not transmitted from the reception apparatus 13 after a predetermined period of time (after a predetermined time has been clocked), the network controller 36 can presume that there is a problem, such as a failure of the network 12, or that the reception apparatus 13 is missing.

[0111]

An example of the state of the reception apparatus 13 (Fig. 3) will now be described with reference to Fig. 5.

[0112]

In this example, as shown in Fig. 5, the state of the reception apparatus 13 is one of the states RA to RC.

[0113]

The state RA indicates that the reception apparatus 13 is in the OFF state, i.e., that the reception apparatus 13 does not receive (rejects to receive) the RTP (image signal) from any of the transmission

apparatuses (the transmission apparatus 11-1 and the transmission apparatus 11-2 in the example of Fig. 1).

[0114]

The state RB indicates that the reception apparatus 13 is in an idle state, i.e., that the reception apparatus 13 has not yet received, but is ready for receiving, the RTP from one of the transmission apparatuses 11-1 and 11-2 connected to the network 12.

[0115]

The state RC indicates that the reception apparatus 13 is receiving the RTP from one of the transmission apparatuses 11-1 and 11-2 connected to the network 12.

[0116]

The network controller 76 (Fig. 3) of the reception apparatus 13 changes the state of the reception apparatus 13 to one of the states RA to RC and controls the reception of the RTP according to the resultant state.

[0117]

A state transition from one of the states RA to RC to one of the states RA to RC (including a case where the same state is continued) is carried out when a state transition condition is satisfied.

[0118]

In Fig. 5, the above-described state transition

conditions are shown in rectangular blocks drawn on arrows, each representing a transition from one state (any of the states RA to RC) to one state (any of the states RA to RC), with numbers 151 to 160.

[0119]

When, for example, the "rtp_rx=ON" command (the command for starting information reception processing) is input (the input device not shown) while the reception apparatus 13 is in the state RA, the network controller 76 determines that the state transition condition 151 has been satisfied, and changes the state of the reception apparatus 13 from the state RA to the state RB.

[0120]

When, for example, the "rtp_rx=OFF" command (command for stopping information reception processing) is input while the reception apparatus 13 is in the state RB, the network controller 76 determines that the state transition condition 152 has been satisfied, and changes the state of the reception apparatus 13 from the state RB to the state RA.

[0121]

When the state of the reception apparatus 13 is changed from the state RA to the state RB, as described above, the receiver 80 receives a multiplexed signal of

the RTP (image signal) and the RTCP (the first control signal) or the RTCP transmitted from the transmission apparatus 11 via the network 12. When the signal received by the receiver 80 is a multiplexed signal, the arbiter comparator 81 separates the RTCP from the RTP, and supplies the RTCP to the buffer 82. If the signal received by the receiver 80 is the RTCP, the arbiter comparator 81 supplies the RTCP as-is to the buffer 82.

[0122]

The network controller 76 acquires the RTCP stored in the buffer 82, compares the RTCP with the reception acceptance information stored in the database 75, and determines whether or not to reject to receive the RTP from the transmission apparatus 11 that has transmitted the RTCP.

[0123]

When the network controller 76 determines that the RTP from the transmission apparatus 11 that has transmitted the RTCP should not be received, it determines that the state transition condition 153 has been satisfied, generates the RTCP RR (rejection) 201 functioning as the second control signal, and transmits it to the transmission apparatus 11 that has transmitted the RTCP via the buffer 77, the arbiter 78, the

transmitter 79, and the network 12. The network controller 76 then changes the state of the reception apparatus 13 from the state RB to the state RB (no state transition is made).

[0124]

In contrast, when the network controller 76 determines that the RTP from the transmission apparatus 11 that has transmitted the RTCP should be received, it determines that the state transition condition 154 has been satisfied, generates the RTCP RR (without error) 202, and transmits it to the transmission apparatus 11 that has transmitted the RTCP via the buffer 77, the arbiter 78, the transmitter 79, and the network 12. The network controller 76 then changes the state of the reception apparatus 13 from the state RB to the RC.

[0125]

If, for example, the RTCP RR (without error) 202 is transmitted to the transmission apparatus 11-1 and the state of the reception apparatus 13 is changed from the state RB to the state RC, the transmission apparatus 11-1, as described above, transmits a multiplexed signal of the RTP and the RTCP or the RTCP to the reception apparatus 13 via the network 12.

[0126]

In this case, as described above, the receiver 80 receives the multiplexed signal or the RTCP and supplies it to the arbiter comparator 81. If the supplied signal is a multiplexed signal, the arbiter comparator 81 separates the multiplexed signal into the RTP and the RTCP, stores the RTCP in the buffer 82, and stores the RTP in the buffer 83. Furthermore, when the supplied signal is the RTCP, the arbiter comparator 81 stores the RTCP as-is in the buffer 82.

[0127]

As described above, the demultiplexer 84 separates the RTP stored in the buffer 83 into the video signal and the audio signal. The demultiplexer 84 then has the video decoder 85 decode the video signal, which is then supplied to the video tape recorder 61. Furthermore, the demultiplexer 84 has the audio decoder 86 decode the audio signal, which is then supplied to the video tape recorder 61.

[0128]

The network controller 76 measures an error in the RTP stored in the buffer 83. When the RTP is normal (the error is at a predetermined level or lower), the network controller 76 determines that the state transition condition 156 has been satisfied, generates the RTP RR

(without error) 202, and transmits it to the transmission apparatus 11 that has transmitted the RTCP via the buffer 77, the arbiter 78, the transmitter 79, and the network 12. The network controller 76 then changes the state of the reception apparatus 13 from the state RC to the state RC (no state transition is made).

[0129]

In contrast, if the measured error is above a predetermined level, the network controller 76 determines that the state transition condition 158 has been satisfied, generates the RTP RR (with error) 203, and transmits it to the transmission apparatus 11 that has transmitted the RTCP via the buffer 77, the arbiter 78, the transmitter 79, and the network 12. The network controller 76 then changes the state of the reception apparatus 13 from the state RC to the state RC (no state transition is made).

[0130]

In this state (state RC where the reception apparatus 13 is receiving the RTP from the transmission apparatus 11-1), when the RTCP or the multiplexed signal of the RTP and the RTCP from another transmission apparatus 11-2 is transmitted to the reception apparatus 13 via the network 12, the network controller 76 acquires

the RTCP in the signal transmitted by the transmission apparatus 11-2 via the receiver 80, the arbiter comparator 81, and the buffer 82. However, since the reception apparatus 13 is in the state RC where the RTP from the transmission apparatus 11-1 is being received, the reception apparatus 13 determines that it cannot receive the RTP from the transmission apparatuses 11-2.

[0131]

Thus, the network controller 76 determines that the state transition condition 157 has been satisfied, generates the RTP RR (rejection) 201, and transmits it to the transmission apparatus 11-2 via the buffer 77, the arbiter 78, the transmitter 79, and the network 12. Furthermore, the network controller 76 changes the state of the reception apparatus 13 from the state RC to the state RC (no state transition is made).

[0132]

When the transmission apparatus 11-2, as described above, receives the RTP RR (rejection) 201 transmitted by the receiver 80 via the network 12, the transmission apparatus 11-2 stops the distribution of the RTP (the multiplexed signal of the RTP and the RTCP) to the reception apparatus 13. It is to be noted, however, that the transmission apparatus 11-2 still periodically

transmits the RTCP to the reception apparatus 13 via the network 12.

[0133]

Furthermore, when the state of the reception apparatus 13 is the state RC, the network controller 36 performs clocking with a timer (not shown in the figure). In this case, if the multiplexed signal of the RTP and the RTCP or the RTCP is not transmitted from the transmission apparatus 11-1 after a predetermined period of time (e.g., "30 seconds" in this example) is clocked, the network controller 36 determines that the state transition condition 155 has been satisfied to change the state of the reception apparatus 13 from the state RC to the state RB.

[0134]

As a result, the reception apparatus 13 can receive the RTP from the transmission apparatus 11-2. Subsequently, when the reception apparatus 13 receives the RTCP from the transmission apparatus 11-2, it determines that the above-described state transition condition 154 has been satisfied, generates the RTCP RR (without error) 202 for the transmission apparatus 11-2, and transmits it via the network 12. The state of the reception apparatus 13 is then changed from the state RB

to the state RC, and subsequently, the transmission apparatus 11-2 transmits the multiplexed signal of the RTP and the RTCP or the RTCP to the reception apparatus 13 via the network 12.

[0135]

Furthermore, even if the state of the reception apparatus 13 is the state RC, the network controller 76 determines that the state transition condition 159 has been satisfied when, for example, the "rtp_rx=OFF" command is input, as in the state RB, and changes the state of the reception apparatus 13 from the state RC to the state RA.

[0136]

An example of the overall operation of the information distribution system 1 in Fig. 1 will now be described with reference to Fig. 6.

[0137]

It is assumed that when, for example, the state of each of the transmission apparatus 11-1 and the transmission apparatus 11-2 is the state SA (Fig. 4) and the state of the reception apparatus 13 is the state RB (Fig. 5), the state transition condition 104 of the transmission apparatus 11-1 (Fig. 4) is satisfied (the command "rtp_tx=ON" is input).

[0138]

At a time t1 immediately after the state transition condition 104 has been satisfied, the transmission apparatus 11-1 transmits a multiplexed signal 211 of the RTP (image signal) and the RTCP (the first control signal) (hereinafter, this multiplexed signal is referred to as the RTP+RTCP) to the reception apparatus 13 via the network 12.

[0139]

At this time, the reception apparatus 13 receives the RTP+RTCP 211, determines that, for example, the state transition condition 154 (Fig. 5) has been satisfied, generates the RTCP RR (without error) 202 as the second control information in response to the RTCP (RTCP included in the RTP+RTCP 211) from the transmission apparatus 11-1, and transmits it to the transmission apparatus 11-1 via the network 12.

[0140]

When the state transition condition 104 is satisfied, each of the transmission apparatus 11-1 and the transmission apparatus 11-2 may transmit the RTCP only. In this example, however, in order to make it possible to distribute an image signal to a reception apparatus (not shown in the figure) other than the

reception apparatus 13, the RTP+RTCP 211 is first transmitted, as described above.

[0141]

When the transmission apparatus 11-1 receives via the network 12 the RTCP RR (without error) 202 transmitted from the reception apparatus 13, the transmission apparatus 11-1 subsequently transmits the RTP+RTCP 211 or the RTP 212 to the reception apparatus 13 via the network 12 to the reception apparatus 13.

[0142]

When the reception apparatus 13 receives the RTP+RTCP 211, it measures the error in the received RTP (RTP included in the RTP+RTCP 211). When the measured error is at a predetermined level or lower, the reception apparatus 13 determines that the transition estimation condition 156 (Fig. 5) has been satisfied, generates the RTCP RR (without error), and transmits it to the transmission apparatus 11-1 via the network 12.

[0143]

In contrast, if the measurement result as to the error in the RTP included in the RTP+RTCP 211 received, for example, at a time t_2 is above a predetermined level, the reception apparatus 13 determines that the transition estimation condition 158 (Fig. 5) has been satisfied,

generates the RTCP RR (with error) 203, and transmits it to the transmission apparatus 11-1 via the network 12.

[0144]

When the transmission apparatus 11-1 receives the RTCP RR (with error) 203, it determines that the state transition condition 113 (Fig. 4) has been satisfied, and changes the state from the state SB to the state SD. As described above, even if the transmission apparatus 11-1 changes its state from the state SB to the state SD, it continues to transmit the RTP+RTCP 211 or the RTCP 212 to the reception apparatus 13 via the network 12 to the reception apparatus 13.

[0145]

Subsequently, suppose that, for example, the state transition condition 104 (Fig. 4) of the transmission apparatus 11-2 has been satisfied (suppose that command "rtp_tx=ON" is input).

[0146]

At a time t3 immediately after the state transition condition 104 has been satisfied, the transmission apparatus 11-2 transmits the RTP+RTCP 211 to the reception apparatus 13 via the network 12.

[0147]

When the reception apparatus 13 receives the

RTP+RTCP 211, it determines that the state transition condition 157 (Fig. 5) has been satisfied because it is in the state RC where the RTP from the transmission apparatus 11-1 is being received. Thus, the reception apparatus 13 generates the RTCP RR (rejection) 201 as the second control information in response to the RTCP (RTCP included in the RTP+RTCP 211) from the transmission apparatus 11-2, and transmits it to the transmission apparatus 11-2 via the network 12.

[0148]

When the transmission apparatus 11-2 receives the RTCP RR (rejection) 201 via the network 12, it determines that the state transition condition 107 (Fig. 4) has been satisfied, and changes the state from the state SB to the state SC. In short, the transmission apparatus 11-2 stops the subsequent transmission of the RTP+RTCP 211 to the reception apparatus 13. It is to be noted, however, that the transmission apparatus 11-2 still periodically transmits the RTCP 212 to the reception apparatus 13 via the network 12.

[0149]

Suppose, for example, that the transmission apparatus 11-2 transmits the RTCP 212 to the reception apparatus 13 via the network 12 at a time t4. In this

assumption, since the reception apparatus 13 is still in the state RC where the RTP from the transmission apparatus 11-1 is being received, the reception apparatus 13 determines that the state transition condition 157 (Fig. 5) has been satisfied, and thus generates the RTCP RR (rejection) 201 to transmit it to the transmission apparatus 11-2 via the network 12.

[0150]

At this time, the transmission apparatus 11-1 continues to transmit the RTP+RTCP 211 or the RTCP 212 to the reception apparatus 13 via the network 12 to the reception apparatus 13.

[0151]

For example, when the transmission apparatus 11-1 transmits the RTP+RTCP 211 to the reception apparatus 13 via the network 12 at a time t5, the reception apparatus 13 receives it, and measures an error in the RTP included in the RTP+RTCP 211. If, for example, the measurement result indicates that the error is at a predetermined level or lower, the reception apparatus 13 determines that the transition estimation condition 156 (Fig. 5) has been satisfied, generates the RTCP RR (without error) 202, and transmits it to the transmission apparatus 11-1 via the network 12.

[0152]

When the transmission apparatus 11-1 receives the RTCP RR (without error) 202, it determines that the state transition condition 114 (Fig. 4) has been satisfied, and changes the state from the state SD to the state SB.

[0153]

The transmission apparatus 11-1 continues to transmit the RTP+RTCP 211 or the RTCP 212 to the reception apparatus 13 via the network 12 to the reception apparatus 13.

[0154]

Subsequently, if the state transition condition 103 (Fig. 4) of the transmission apparatus 11-1 has been satisfied (if command "rtp_tx=OFF" has been input), for example, at a time t6, the transmission apparatus 11-1 changes its state from the state SB to the state SA.

[0155]

As a result, the transmission apparatus 11-1 stops the transmission of the RTP+RTCP 211 and the RTCP 212 to the reception apparatus 13 via the network 12. Thus, since the reception apparatus 13 does not receive the RTP+RTCP 211 or the RTCP 212 from the transmission apparatus 11-1, it determines that the state transition condition 155 (Fig. 5) has been satisfied at a time t7

after a predetermined time from the time t6, and changes the state from the state RC to the state RB.

[0156]

At this time, the transmission apparatus 11-2 periodically transmits the RTCP 212 to the reception apparatus 13 via the network 12. In this case, when the transmission apparatus 11-2 transmits the RTCP 212 to the reception apparatus 13 via the network 12 at a time t8 after the time t7 (after the state of the reception apparatus 13 has been changed to the state RB), the reception apparatus 13 receives it, determines that the state transition condition 154 (Fig. 5) has been satisfied, generates the RTCP RR (without error) 202, and transmits it to the transmission apparatus 11-2 via the network 12. The reception apparatus 13 then changes its state from the state RB to the state RC.

[0157]

When the transmission apparatus 11-2 receives the RTCP RR (without error) 202, the transmission apparatus 11-2 determines that the state transition condition 108 (Fig. 4) has been satisfied, and changes its state from the state SC to the state SB. Subsequently, the transmission apparatus 11-2 transmits the RTP+RTCP 211 or the RTCP 212 to the reception apparatus 13 via the

network 12.

[0158]

When the reception apparatus 13 receives the RTP+RTCP 211 or the RTCP 212 from the transmission apparatus 11-2, the reception apparatus 13 generates the RTCP RR (RTCP RR (without error) 202 in the example of Fig. 6) as a response to the RTCP included in the RTP+RTCP 211 or the RTCP 212, and transmits it to the transmission apparatus 11-2 via the network 12.

[0159]

Subsequently, when the state transition condition 159 (Fig. 5) of the reception apparatus 13 is satisfied (when the command "rtp_rx=OFF" is input), for example, at a time t9, the reception apparatus 13 changes the state from the state RC to the state RA.

[0160]

Thus, the reception apparatus 13 does not accept the reception of the RTP from one of the transmission apparatus 11-1 and the transmission apparatus 11-2. Therefore, when the transmission apparatus 11-2 transmits the RTCP 212 to the reception apparatus 13 via the network 12 at a time t10 after the time t9 (after the state of the reception apparatus 13 has been changed to the state RA) and the reception apparatus 13 receives it,

the reception apparatus 13 determines that the state transition condition 160 (Fig. 5) has been satisfied, generates the RTCP RR (rejection) 201, and transmits it to the transmission apparatus 11-2 via the network 12.

[0161]

When the transmission apparatus 11-2 receives the RTCP RR (rejection) 201, the transmission apparatus 11-2 determines that the state transition condition 107 (Fig. 4) has been satisfied, and changes the state from the state SB to the state SC. In short, the transmission apparatus 11-2 stops the subsequent transmission of the RTP+RTCP 211 to the reception apparatus 13 via the network 12.

[0162]

Similarly, for example, if the state transition condition 104 (Fig. 4) of the transmission apparatus 11-1 has been satisfied (if the command "rtp_tx=ON" is input) at a time t11 after the time t9 (after the state of the reception apparatus 13 has been changed to the state RA), the transmission apparatus 11-1 changes the state from the state SA to the state SB, and transmits the RTP+RTCP 211 to the reception apparatus 13 via the network 12.

[0163]

In this case, when the reception apparatus 13

receives the RTP+RTCP 211, the reception apparatus 13 determines that the state transition condition 160 (Fig. 5) has been satisfied, generates the RTCP RR (rejection) 201, and transmits it to the transmission apparatus 11-1 via the network 12.

[0164]

When the transmission apparatus 11-1 receives the RTCP RR (rejection) 201, the transmission apparatus 11-1 determines that the state transition condition 107 (Fig. 4) has been satisfied, and changes the state from the state SB to the state SC. In short, the transmission apparatus 11-1 also stops the subsequent transmission of the RTP+RTCP 211 to the reception apparatus 13 via the network 12.

[0165]

As described above, in the information distribution system 1, each of the transmission apparatus 11-1 and the transmission apparatus 11-2 generates the first control signal (RTCP) that makes a request to the reception apparatus 13 for the transmission of the result of a determination as to whether or not the reception apparatus 13 can receive the image signal (RTP), and then transmits the RTCP to the reception apparatus 13 via the network 12. When the information reception apparatus 13

receives the RTCP, the information reception apparatus 13 determines whether or not it receives the RTP from the transmission apparatus 11-1 or 11-2 that has transmitted the RTCP, generates the second control signal (the RTCP RR (acceptance) (the RTCP RR (without error) or the RTCP RR (with error)) or the RTCP RR (rejection)) indicating the determination result, and transmits it to the corresponding transmission apparatus 11-1 or 11-2 via the network 12.

[0166]

Therefore, when each of the transmission apparatus 11-1 and the transmission apparatus 11-2, sharing the limited band of the network 12, distributes (transfers) an image signal in the information distribution system 1, it is possible to avoid conflicting the respective transfer packets. Furthermore, the transmission apparatus 11-1 can detect the reception state at the reception apparatus 13. Furthermore, the reception apparatus 13 can acquire an image signal from two or more transmission apparatuses (the transmission apparatus 11-1 and the transmission apparatus 11-2 in the example of Fig. 1).

[0167]

The above-described series of processing can be carried out not only with hardware but also with software.

processing with other units via a network 12 (Fig. 1) are connected to the input/output interface 309.

[0173]

Furthermore, a drive 310 is connected to the input/output interface 309 as required, and a removable recording medium 311, such as a magnetic disk, an optical disc, an magneto-optical disk, or a semiconductor memory, is placed in the drive 310, so that a computer program read out from them is installed into the storage unit 307, as required.

[0174]

The programs for carrying out the above-described series of processing are installed via a network or from a recording medium. As shown in Fig. 7, the recording medium containing the program may be a removable recording medium 311 (package medium), placed in the drive 310, including a magnetic disk (including a flexible disk); an optical disc (including a compact disk-read only memory, i.e., CD-ROM and a digital versatile disk, i.e., DVD); a magneto-optical disk (including a mini-disk, i.e., MD); or a semiconductor memory if such a program is supplied on the recording medium separately from a user's computer. The recording medium may be the ROM 302 or a hard disk in the storage

unit 307 of a user's computer if the program is supplied preinstalled in the ROM 302 or a hard disk of the user's computer.

[0175]

In the present invention, the steps of programs recorded on the recording medium may or may not be followed time-sequentially in order of described steps. Furthermore, the steps may be followed in parallel or independently from one another.

[0176]

Furthermore, in this description, the term "system" indicates the entire apparatus including a plurality of apparatuses and processing units.

[0177]

[Effects of the Invention]

As described above, according to this embodiment, a large volume of information, such as an image signal, can be distributed. In addition, an image transmitted from each of two or more transmission apparatuses can be distributed to a reception apparatus even in a limited band.

[Detailed Description of the Drawings]

[Fig. 1]

Fig. 1 is a block diagram showing an example structure of an information distribution system to which the present invention is applied.

[Fig. 2]

Fig. 2 is a block diagram showing an example structure of a transmission apparatus of the information distribution system in Fig. 1.

[Fig. 3]

Fig. 3 is a block diagram showing an example structure of a reception apparatus of the information distribution system in Fig. 1.

[Fig. 4]

Fig. 4 is a diagram showing a state transition of the transmission apparatus in Fig. 2.

[Fig. 5]

Fig. 5 is a diagram showing a state transition of the reception apparatus in Fig. 3.

[Fig. 6]

Fig. 6 is a time chart illustrating the operation of the information distribution system in Fig. 1.

[Fig. 7]

Fig. 7 is a block diagram showing another example structure of a transmission apparatus or a reception apparatus of an information distribution system to which

the present invention is applied.

[Description of Reference Symbols]

1: Information distribution system, 11: Transmission apparatus, 12: Network, 13: Reception apparatus, 34: Buffer, 35: Database, 36: Network controller, 37: Buffer, 38: Arbiter, 39: Transmitter, 40: Receiver, 41: Arbiter comparator, 42: Buffer, 43: Buffer, 74: Buffer, 75: Database, 76: Network controller, 77: Buffer, 78: Arbiter, 79: Transmitter, 80: Receiver, 81: Arbiter comparator, 82: Buffer, 83: Buffer, 101 to 116, 151 to 160: state transition conditions, 201 to 203: Second control signals, 211: Image signal and multiplexed signal of first control signal, 212: first control signal, SA to SD: States of transmission apparatus, RA to RC: States of reception apparatus

[Name of Document] Abstract of the Disclosure

[Abstract]

[Object] To reliably distribute an image transmitted from each of two or more transmission apparatuses to a reception apparatus.

[Solving Means] A transmission apparatus 11-1 transmits to a reception apparatus 13 via a network 12 first control information for making a request for transmission of a result of a determination as to whether or not the reception apparatus 13 can receive information. When the reception apparatus 13 receives the first control information, the reception apparatus 13 generates second control information indicating whether or not to receive the information transmitted by the transmission apparatus 11-1, and transmits the second control information to the transmission apparatus 11-1 via the network 12. When the received second control information is information indicating that the information is not received, the transmission apparatus 11-1 prohibits the transmission of the information to the reception apparatus 13. The present invention can be applied to an information distribution system for distributing image signals.

[Selected Drawing] FIG. 1

[Name of Document] Drawings

[FIG. 1]

11-1: Transmission apparatus

11-2: Transmission apparatus

12: Network

13: Reception apparatus

[FIG. 2]

11: Transmission apparatus

12: Network

21: Video tape recorder

31: Video encoder

32: Audio encoder

33: Multiplexer

34: Buffer

35: Database

36: Network controller

37: Buffer

38: Arbiter

39: Transmitter

40: Receiver

41: Arbiter comparator

42: Buffer

43: Buffer

44: Demultiplexer

45: Video decoder

46: Audio decoder

[FIG. 3]

12: Network

13: Reception apparatus

61: Video tape recorder

71: Video encoder

72: Audio encoder

73: Multiplexer

74: Buffer

75: Database

76: Network controller

77: Buffer

78: Arbiter

79: Transmitter

80: Receiver

81: Arbiter comparator

82: Buffer

83: Buffer

84: Demultiplexer

85: Video decoder

86: Audio decoder

[FIG. 4]

105: RTCP_RR (without error)

106: Timer (1 second)
107: RTCP_RR (rejection)
108: RTCP_RR (without error)
109: RTCP_RR (rejection)
110: Timer (1 second)
111: Timer (1 second)
112: RTCP_RR (with error)
113: RTCP_RR (with error)
114: RTCP_RR (without error)
115: RTCP_RR (with many errors)

[FIG. 5]

153: Image signal not to be received
154: Image signal to be received
155: Timer
156: Image signal without error
157: Image signal from other transmission apparatus
158: Image signal with error
160: Image signal
201: RTCP_RR (rejection)
202: RTCP_RR (without error)
203: RTCP_RR (with error)

[FIG. 6]

6-1: Time

201: RTCP_RR (rejection)

202: RTCP_RR (without error)

203: RTCP_RR (with error)

[FIG. 7]

305: Input unit

306: Output unit

307: Storage unit


308: Communication unit

309: Input/output interface

310: Drive


311: Removable recording medium

図 1

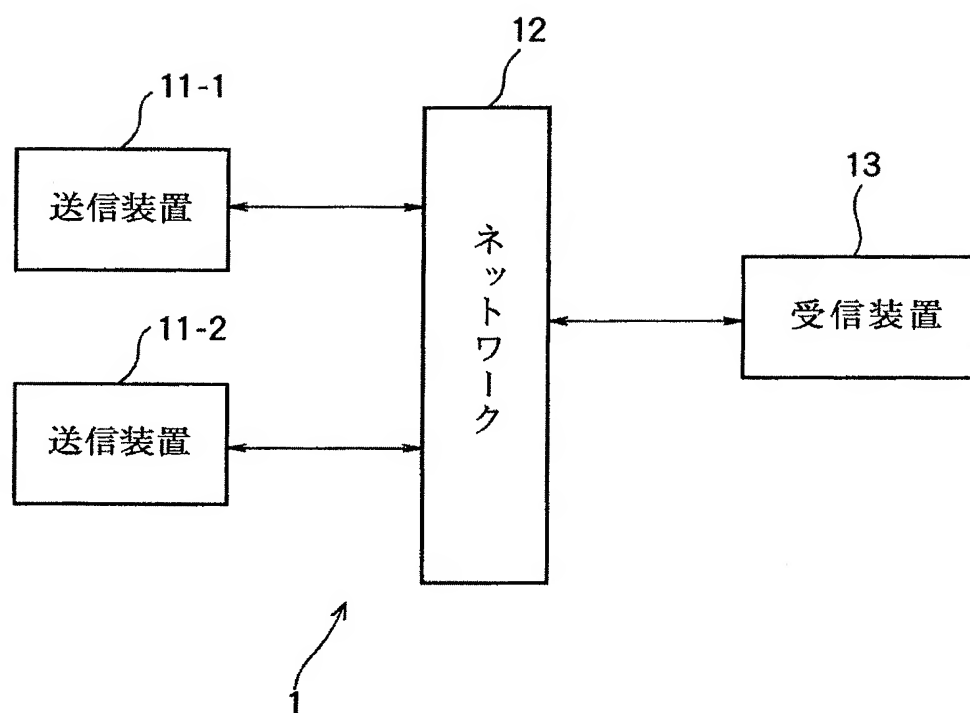


【図 2】

図 2

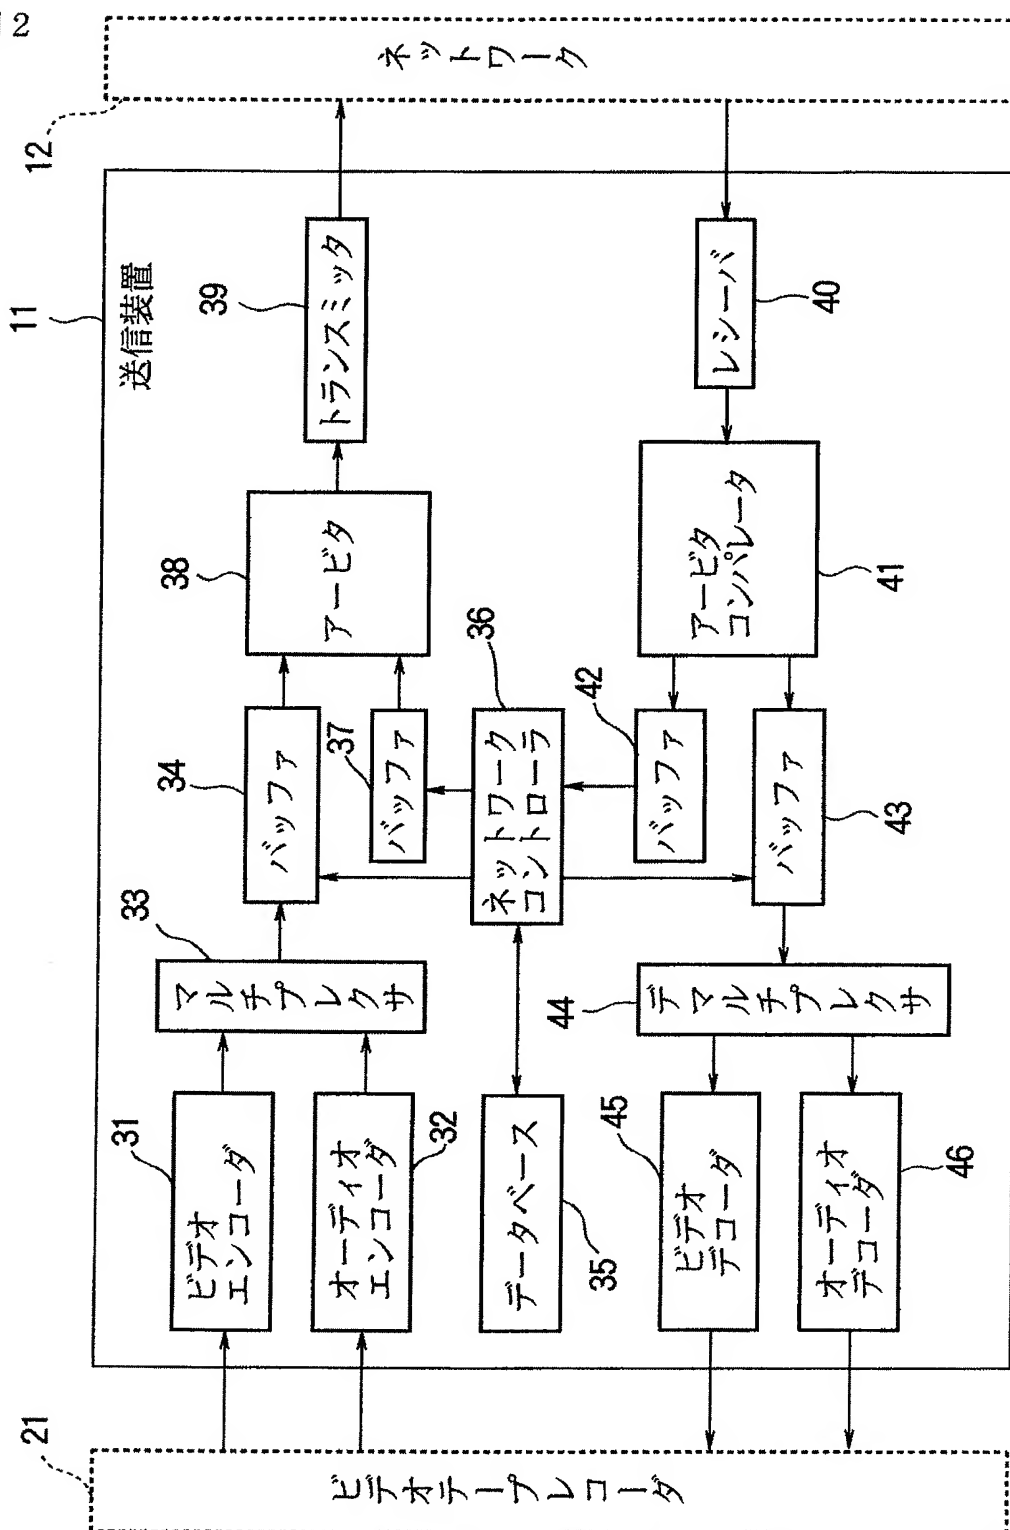


【図 3】

図 3

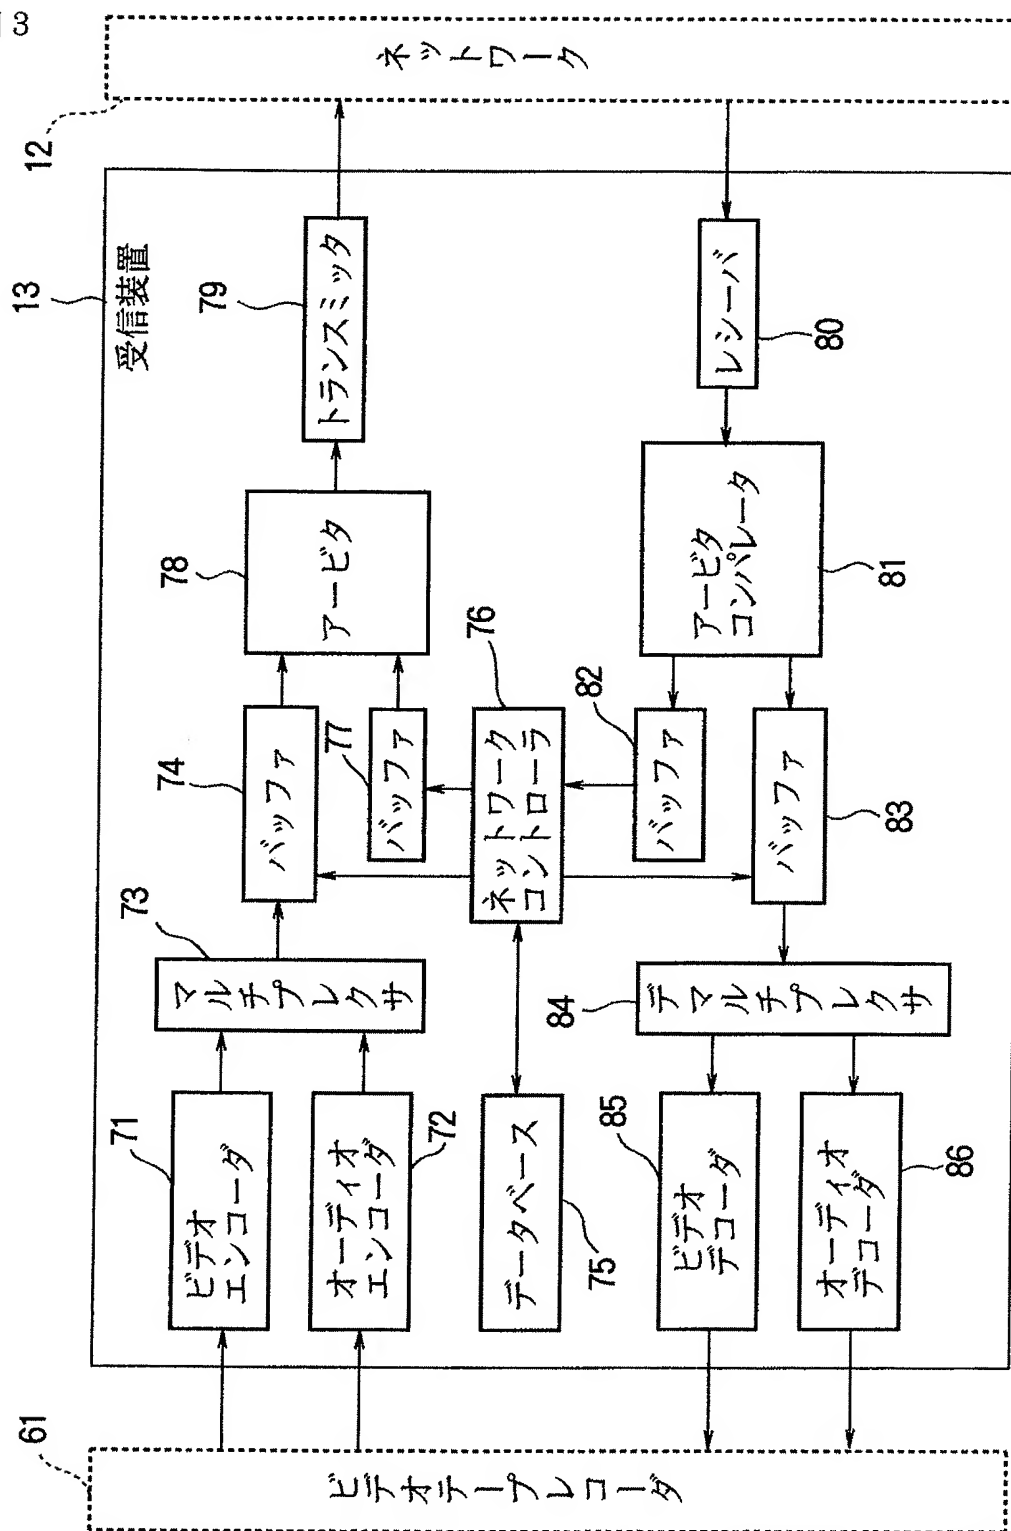


【図 4】

図 4

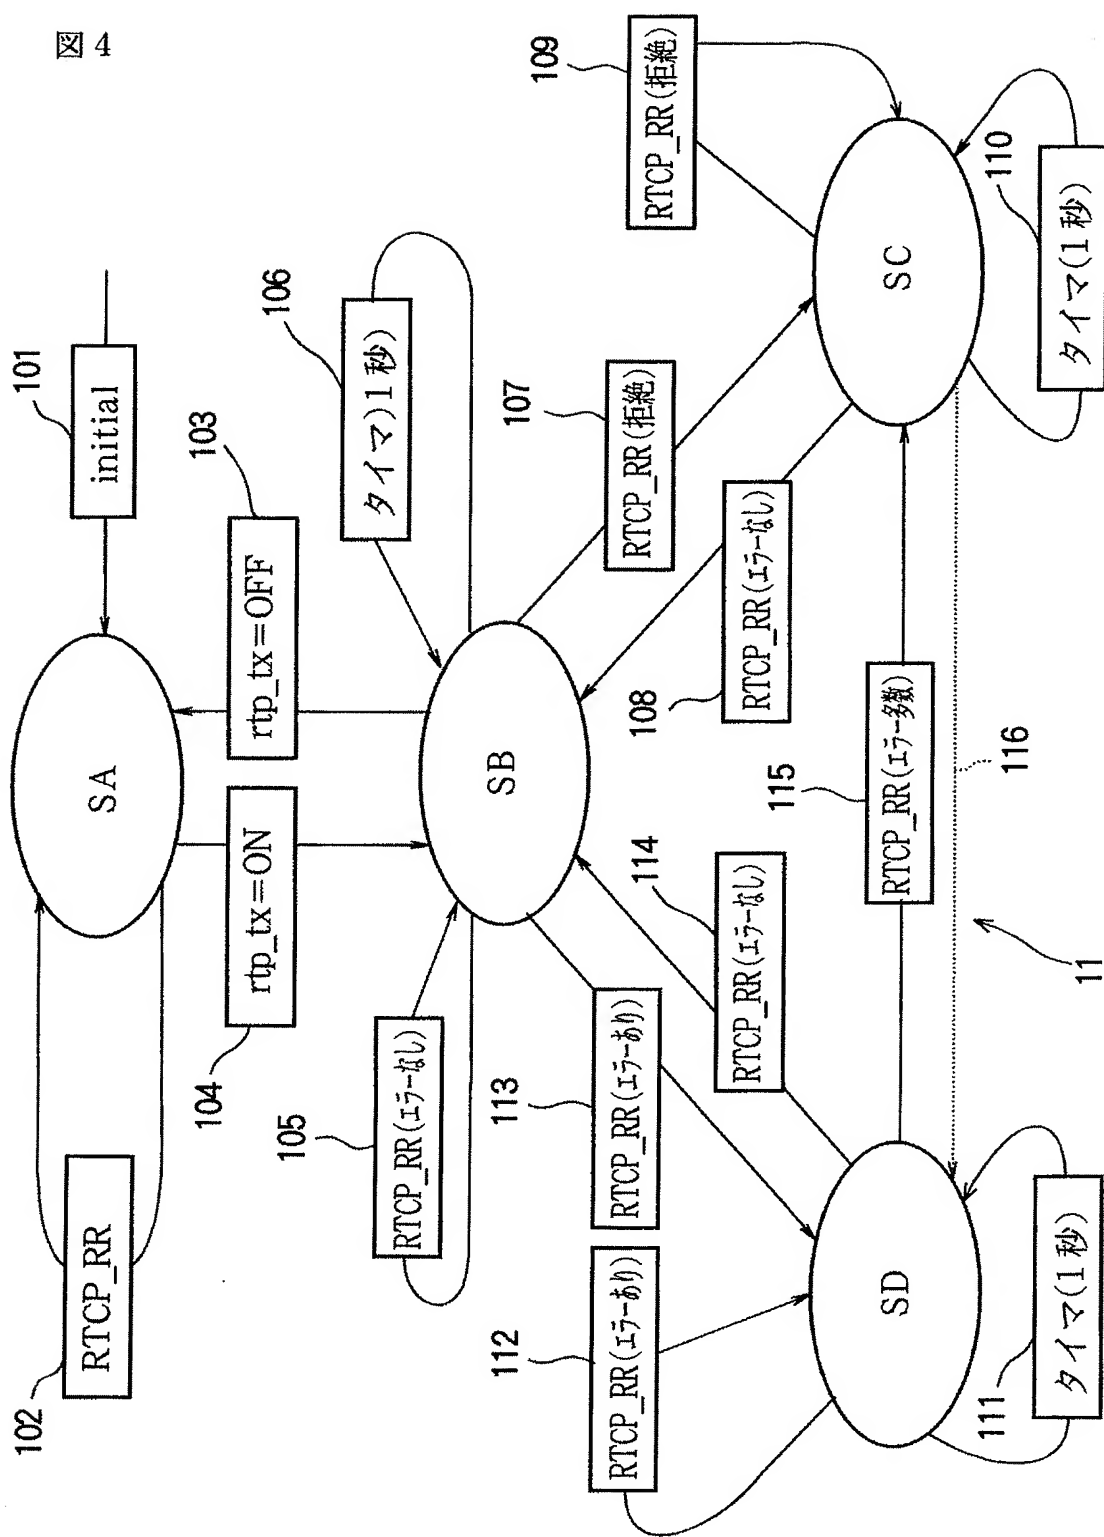


【図 5】

図 5

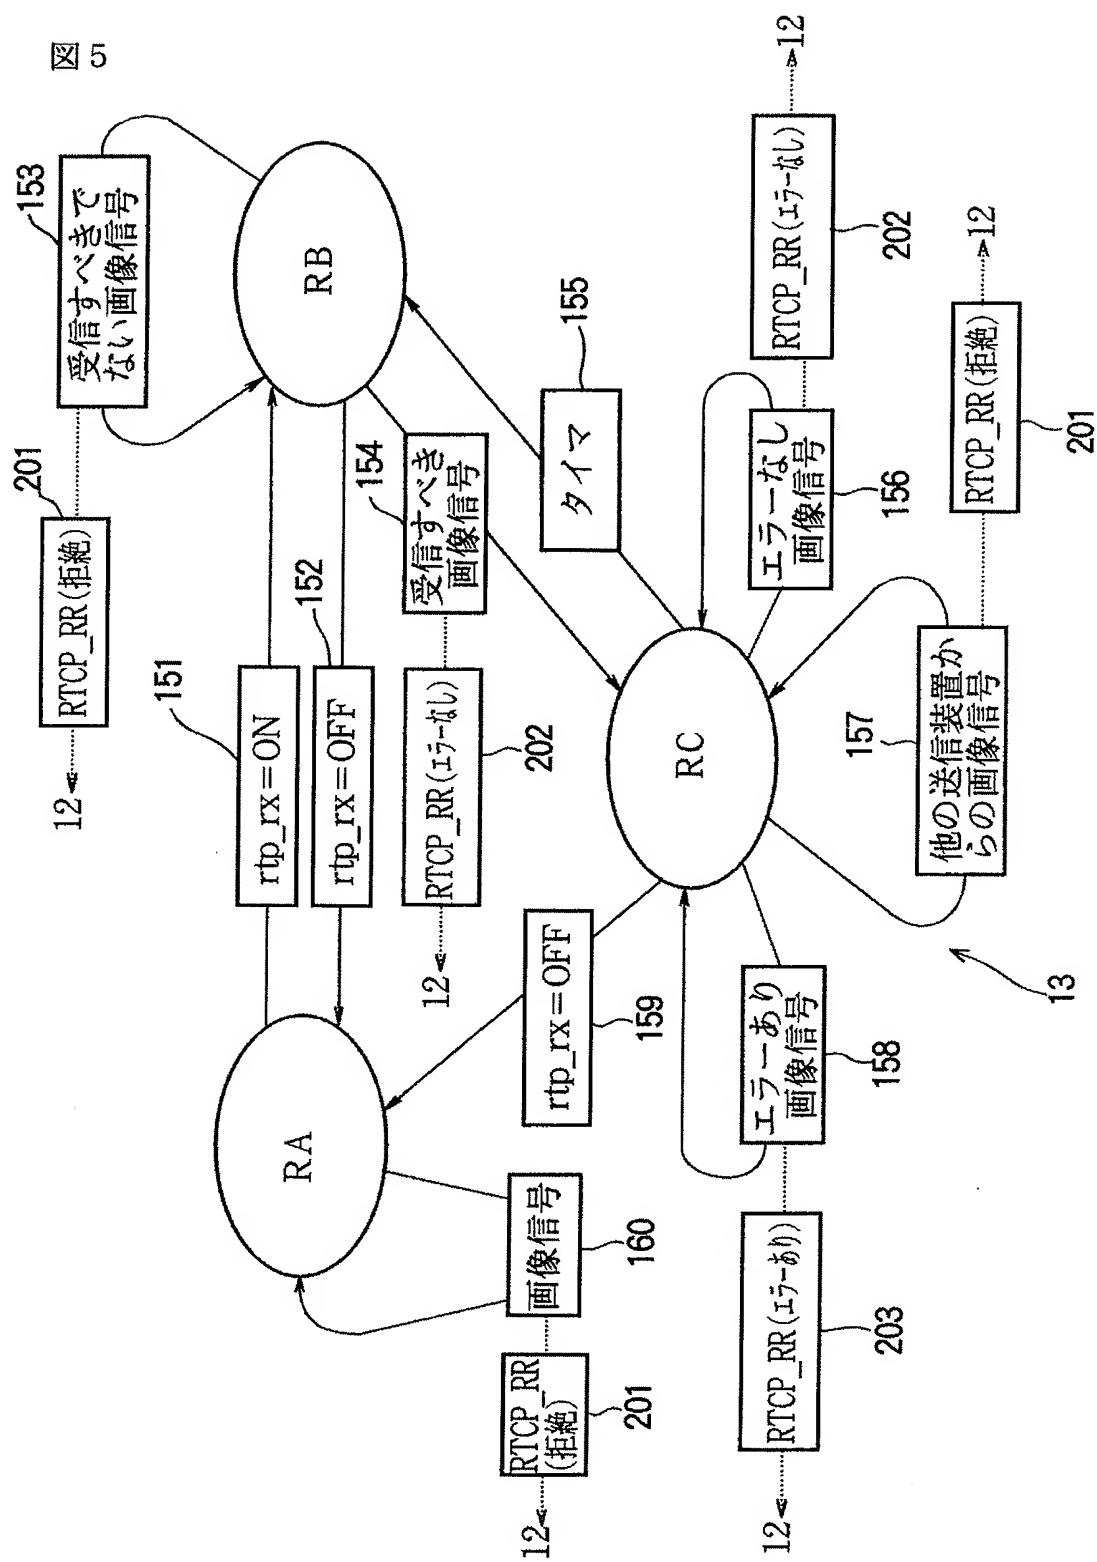


【図 6】



【圖 7】

図 7

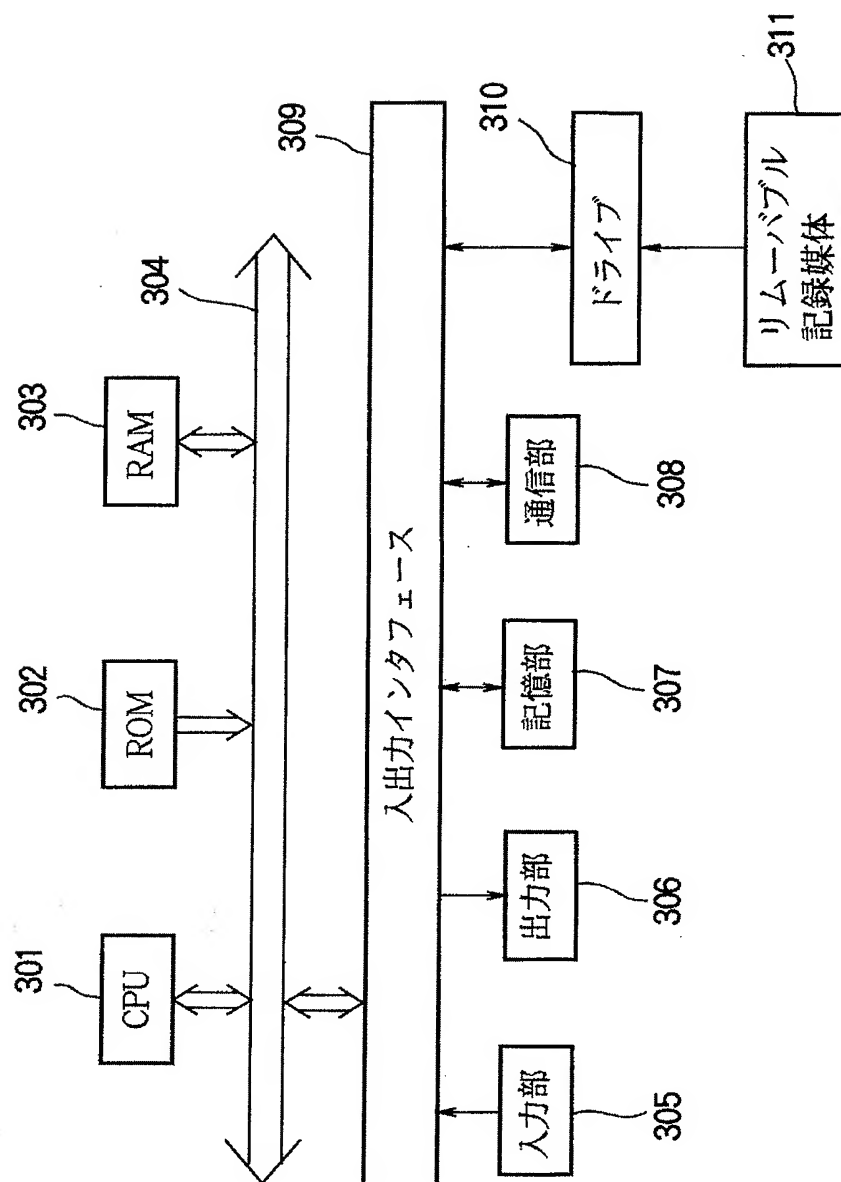

【書類名】 要約書

【要約】

【課題】 複数の送信装置のそれぞれから送信された画像を、受信装置に確実に配信することができるようにする。

【解決手段】 送信装置 11-1 は、受信装置 13 に対して、情報の受信が可能であるか否かの判定結果の送信を要求する第 1 の制御情報をネットワーク 12 を介して送信する。受信装置 13 は、第 1 の制御情報を受信すると、送信装置 11-1 により送信される情報を受信するか否かの判定結果を表す第 2 の制御情報を生